RUTLAND COUNTY
GARDEN FURNITURE
Hand-Crafted

Assembly Instructions

Burley/Greetham 6/4ft
log store

Before you commence the assembly process we recommend that you read these instructions thoroughly beforehand to familiarise yourself with the assembly process and to also check that you have the correct components. If for any reason you need assistance, you can find our contact details on the final page of these instructions.

We highly recommend that any assembly is carried out on a flat, level surface if possible and that you use another person to assist you if necessary. **Note:** 38mm black screws are only included with door option.

Package contents

2 x End panels
1 x Back panel
1 x Base
1 x Lattice
1 x Roof
1 x Kindling Shelf (If ordered)
1 x Door (If Ordered)
4ft x 14, 6ft x 16 Shorter green screws
8 x Longer green screws (For the base only)
10 x 38mm black screws (For doors only)
2 x Spacer blocks

Tools required

Electric screwdriver with No2 Pozidrive bit
Or No2 Pozidrive Screwdriver



Burley/Greetham Log Store

Burley/Greetham 6/4ft log store

Step 1



Ensure that you have all of the correct parts as listed on the front page of these instructions, including any fixings.

Step 2



Stand the left-hand end panel (or right hand for the reversed roof version) upright on a flat, level surface. **Please note**: The reversed roof model will have the highest point of the side panel at the **front of the log store.**

Step 3



Arrange the 2 spacer blocks on the ground, adjacent to the end panel as shown in the photo above. Now place a back panel on the blocks, at 90° to the end panel, aligning the 2 panels ready for fixing.

Step 4



Using the shorter green screws provided, attach the batten on the back panel to the post of the end panel, ensuring that the batten remains vertically aligned to the post.

Burley/Greetham 6/4ft log store

Step 5



Remove the blocks from beneath the back panel and then slide the base into position as shown so that it locates in the gaps in the side panel battens.

Step 6




Now add the right end panel, again locating the base in the gaps in the side panel battens.

Step 7



Secure the right side panel in place with shorter green screws.


Step 8

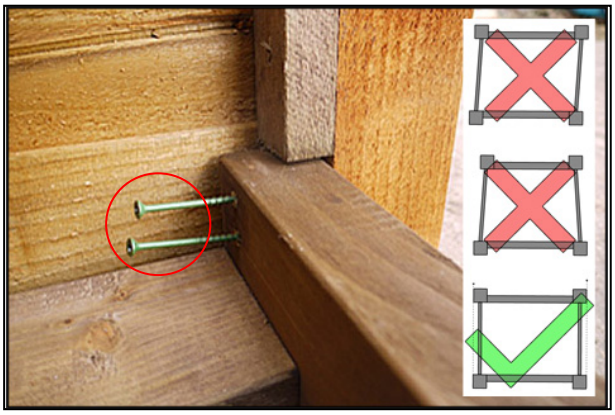

Check that the side panels are parallel with each other and the gap between the posts at the front and back of the store are equal. Now attach the base to the side panel front posts using 2 of the longer green screws for each side...

Burley/Greetham 6/4ft log store

Step 9

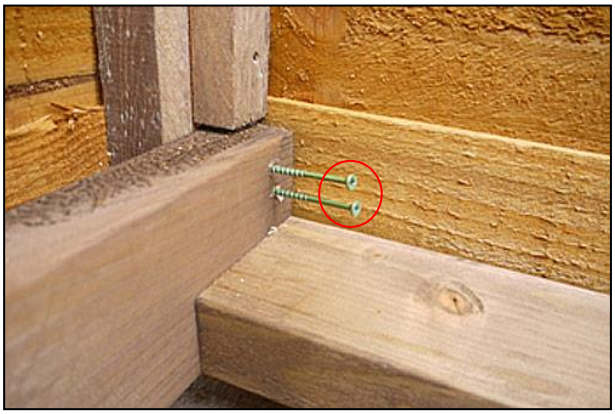

...and attach the base to the end panel rear posts, again using 2 of the longer green screws for each side.

Step 10



Lay the lattice section in the base and then gently lower the roof into place as shown.

Step 11



Check that the front batten ends sit flush with the posts as shown. Now attach the roof to each end panel post with shorter green screws.

Step 12



Secure the rear of the roof using the shorter green screws as shown. Your log store is now complete. If your log store came with doors, proceed to step 13.


Burley/Greetham 6/4ft log store

Step 13




Place a spacer block at the front of the log store adjacent to the front end post and rest the hinge side of the appropriate door on the block, aligning it vertically and horizontally for a good fit. Now use four of the supplied black hinge screws to affix the hinge to the post.

Step 14

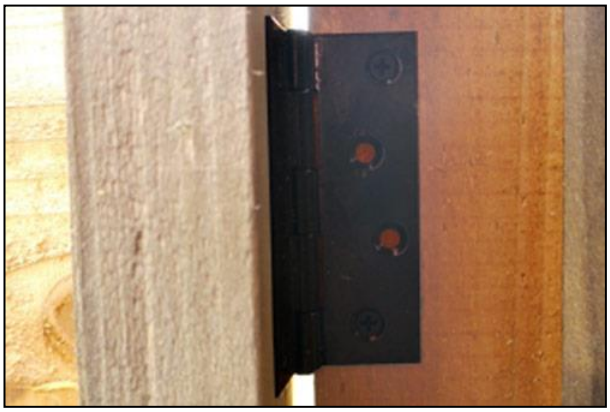

Align the top hinge in place, ensuring that the gap between the door and post is consistent at top and bottom then secure the top hinge in place using more of the black hinge screws

Step 15

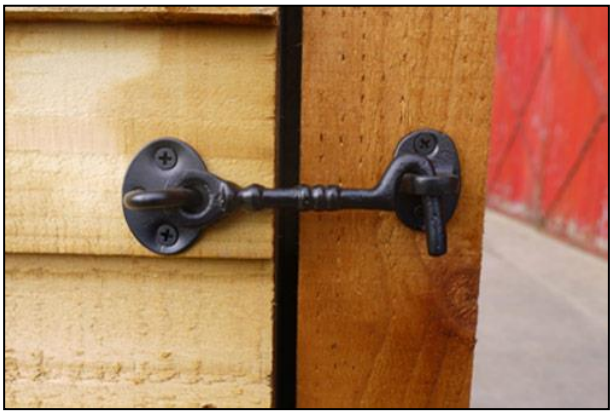

To fit the latch keeper plate, shut the door and hold the latch in the horizontal position. Now fit the keeper and mark its correct fixing position on the post using a pencil or bradawl before securing it in place using the screws provided.

Step 16



The completed log store with door.

Kindling shelf fitting

Step 1




If you are assembly a new log store proceed as normal until the stage where you are ready to add the roof as shown. For a pre-assembled log store simply remove the roof. **Please note: For single bay log stores the following steps can be carried out with the roof fitted**.

Step 2




Take one of the end supports and line it up at one end of your log store at the required height - remember to take account of the roof overhang. Using the side panel slats as a guide, hold the support level and screw into the side panel batten as shown.

Step 3

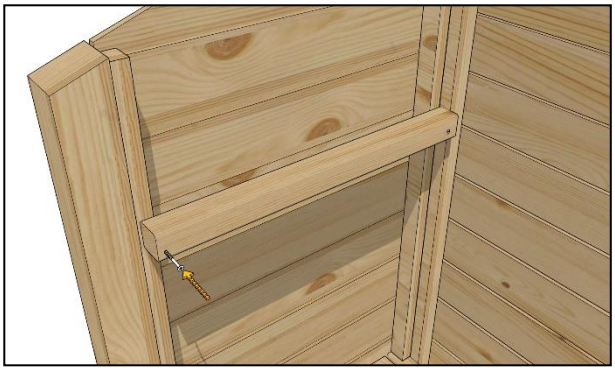

Ensuring that the support is still level, now secure it with another screw at the other end. Repeat this process for the other end, again using the slats in the panels to ensure that both supports are at the same height. If you have a single bay log store (Burley or Greetham) now proceed to step 6.


Step 4

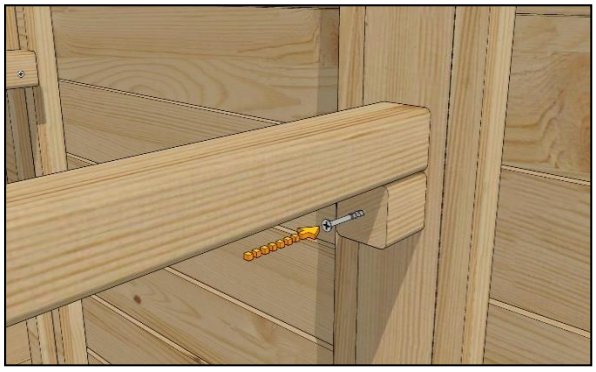

Now fit the centre support(s) by using the slats in the back panels as a guide and referring to the position of the end supports to get the correct fitting height. Screw into the back post after first ensuring that the support sits centred against the face of the post..


Burley/Greetham 6/4ft log store

Step 5

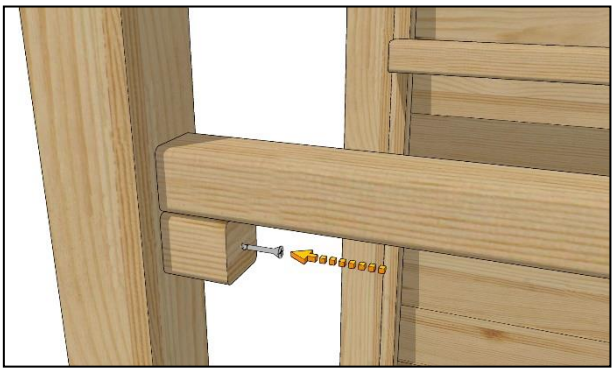

Now secure the front end of the centre support(s) using same method used to secure it at the rear.

Step 6

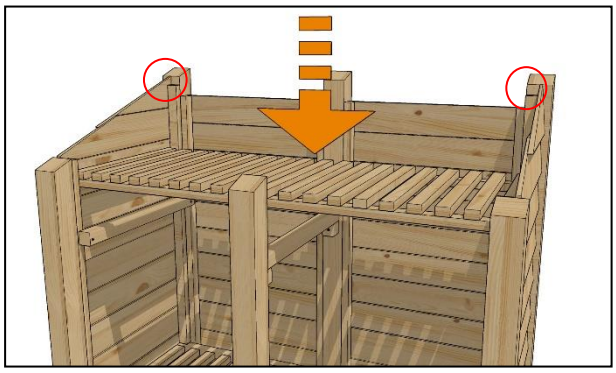

Now lower the kindling shelf into place and attach or replace the roof as necessary. For slatted log stores the kindling shelf will need to be lowered vertically between the openings near the rear of the side panels (highlighted above) first.

We hope that you found your product quick and easy to assemble but if not and you require any further assistance or have any questions you can contact us by telephone on 01778 440803
Email: info@rutlandcountygardenfurniture.co.uk
www.rutlandcountygardenfurniture.co.uk